

9 Series

715kVA – 3340kVA



Diesel generating sets worldwide



Please Note: Above photos may not relate directly to accompanying datasheet model

DN3-AJ1430-9M-MA Diesel (Water cooled), Compact, Three Phase

Prime Standby

Genset Model	DN3-AJ1430P-5M1	DN3-AJ1430S-5M1
400/230V, 50Hz	1270kVA (1016kW)	1430kVA (1144kW)
415/240V, 50Hz	1268kVA (1014kW)	1427kVA (1142kW)
380/220V, 50Hz	1271kVA (1017kW)	1431kVA (1149kW)



Ratings at 0.8pf

Prime: This rating is for the supply of continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation on the annual hours of operation and 10% overload power can be supplied for one hour in twelve hours.


Standby: This rating is for the supply of continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted.

Engine	MTU	AJ1430P: 18V2000G26F	AJ1430S: 18V2000G76F
Number of cylinders		18	18
Cubic capacity	litre (cu inch)	40.2	40.2
Aspiration		Turbocharged	Turbocharged
Alternator	European	MeccAlte	MeccAlte
Frequency	Hz	50	50
Engine Speed	rpm	1500	1500
Fuel tank capacity (optional*)	litre	NA	NA
Fuel consumption at full rating:			
110%	litre / h	269.3	279.
100%	litre / h	249.0	254.5
75%	litre / h	185.8	188.9
50%	litre / h	133.4	133.4
Heat rejection to exhaust system (max)	KW (BTU / min)	684 (38930)	779 (44337)
Heat rejection to cooling system (max)	KW (BTU / min)	645 (36710)	760 (43255)
Total radiated heat (max)	KW (BTU / min)	45 (2561)	45 (2561)
Exhaust temperature (max)	deg C (deg F)	500 (932)	500 (932)
Radiator cooling air flow with max restriction	cu m / min (cfm)	1463 (51666)	1776 (62719)
	mm (inch) H ₂ O	20 (0.787)	20 (0.787)
Combustion air flow (max)	cu m / min (cfm)	80.4 (2839)	90.6 (3200)
Exhaust gas flow (max) with max allowable back pressure	cu m / min (cfm)	206.4 (7289)	237 (8370)
	mm (inch) H ₂ O	500 (19.7)	500 (19.7)

Note: Standard reference conditions: 25deg C (77deg F) air inlet temperature, 152.4, (500 feet) above sea level, 60% relative humidity. All engine performance data based on the above mentioned maximum continuous ratings. Fuel consumption data at full load for diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, class A2. TBA - To be advised. N/A - Not applicable

Dimensions:

Length (A)	mm	5814
Length (A) without circuit breaker	mm	4750
Width (B)	mm	1889
Height (C)	mm	2198

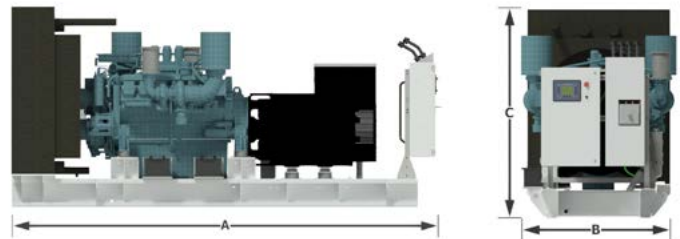

Weights:

Dry weight (with lube oil)	kg	8244
Wet weight (with lube oil and coolant)	kg	8400

In line with our policy of continuous development, we reserve the right to change specification without notice. We have made every effort to provide accurate information. However we are not responsible for errors or omissions.

Sound Pressure levels:

Not Applicable	dB(A)	N/A
----------------	-------	-----

AJ Power Limited

1 Charlestown Drive, Craigavon, BT63 5GA, Northern Ireland, United Kingdom
Tel: +44 (0)28 3836 1000 Fax: +44 (0) 28 3836 1010 Web: www.ajpower.net Email: sales@ajpower.net